




I-TECH 4x3500HD DRIVECORE SERIES

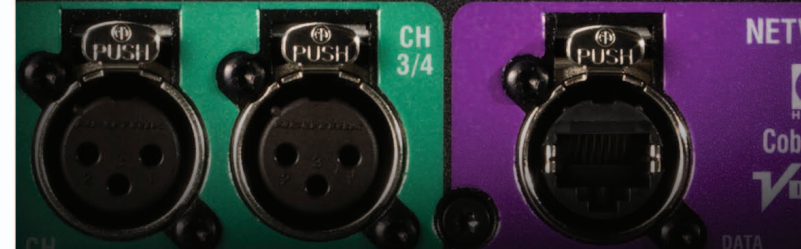

**MORE FLEXIBILITY. NO COMPROMISE.
NO COMPARISON.**

The I-Tech DriveCore™ series of amplifiers represents decades of work developing and refining amplifier technology that pushes the limits of sound reinforcement. It started in 1967 with the world's first solid state, high-powered amplifier with unsurpassed reliability and it continues today with the **first four sound amplifier offering four inputs routable to any output** (analog, AES3, VDrive, or CobraNet), the new I-Tech 4 x 3500HD.

Boasting eight patents – three on the power supply alone – and the amplifier industry's first integrated TFT LCD full-color touchscreen, the I-Tech HD DriveCore series offers a switching power supply with PFC and Crown's patented Class I output stage resulting in greater fidelity at high and low power levels, more efficiency with less waste heat, and unparalleled reliability.

Learn more at crownaudio.com.

DRIVECORE™


A culmination of nearly two decades of R&D, DriveCore is a HARMAN exclusive that combines hundreds of parts into one chip the size of your fingertip, resulting in higher efficiency and unsurpassed reliability.



© 2012 Crown Audio

BSS OMNIDRIVE HD DSP

With the latest programmable studio-grade 32-bit Sharc® processor, FIR and IIR filters, and coordinated LevelMAX™ limiters, this integrated DSP outperforms many of the best standalone DSP loudspeaker processors in the world.

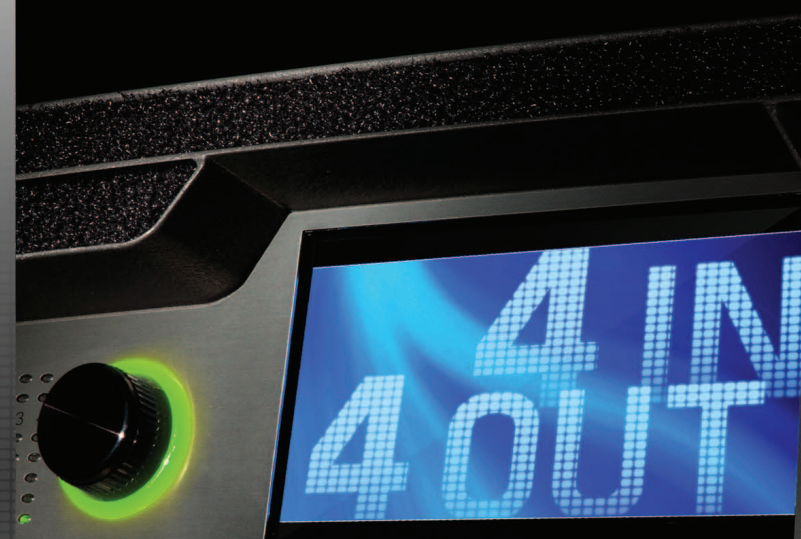

I-TECH 4x3500HD DRIVECORE SERIES

SPECIFICATIONS

CHANNELS	4 inputs (Analog, AES3, VDrive, or CobraNet) routable to any of the 4 outputs		
SENSITIVITY	Adjustable in 0.1dB increments		
RATED POWER OUTPUT (20 Hz to 20 kHz power refers to guaranteed minimum power in watts with 0.35% THD)	2 ohms	2000W	3500W 20ms Burst
	4 ohms	2000W	3500W 20ms Burst
	8 ohm	1500W	1900W 20ms Burst
SIGNAL TO NOISE RATIO (below rated power 20Hz to 20kHz A Weighted)	> -112dB		
TOTAL HARMONIC DISTORTION (THD) (full rated power, 20Hz to 20kHz)	0.35%		
INTERMODULATION DISTORTION (from 0dB down to -40dB)	0.1%		
FREQUENCY RESPONSE (at 1W into 4/8 ohms)	+/- 0.25dB		
CROSSTALK (below rated power 20Hz to 1kHz)	>80dB		
COMMON MODE REJECTION (20Hz to 1kHz)	>80dB Typical		
DIMENSION (H x W x D)	3.3" x 19" x 16.95" 8.9 x 48.3cm x 43.1cm		
NET WEIGHT	29 lbs (13.2kg)		
NET SHIPPING WEIGHT	36 lbs (16.3kg)		



AVAILABLE WITH EITHER BINDING POSTS
OR SPEAKON CONNECTORS.

DRIVECORE™

LevelMAX™

OMNIDRIVEHD™
PROCESSING

GreenEdge
by HARMAN

HIQnet
systemarchitect™



YBL. HIQnet
performance
manager™



Available on the
App Store

MORE FLEXIBILITY. NO COMPROMISE. NO COMPARISON.