


THESE DRAWINGS AND SPECIFICATIONS ARE THE
PROPERTY OF CROWN INTERNATIONAL, INC. AND
SHALL NOT BE REPRODUCED, COPIED, OR USED
AS THE BASIS FOR THE MANUFACTURE OR SALE
OF APPARATUS OR DEVICES WITHOUT PERMISSION

PRINTS TO		DRAWN BY		KLW	02-18-99	APPROVED BY:		DO NOT SCALE PRINT	
G		CHECKED	<i>dlw</i>	<i>2/19/99</i>	ME		SUPERSEDES		
		SCALE		NONE	EE		E. C.		
		PROJ. #	MD439P8		EXT	<i>1/K</i>	DWG. NO. SHEET 1 OF 2		REV
		FILENAME: 127252_A.SCM		NEXT ASSEMBLY:		127252		(A)	

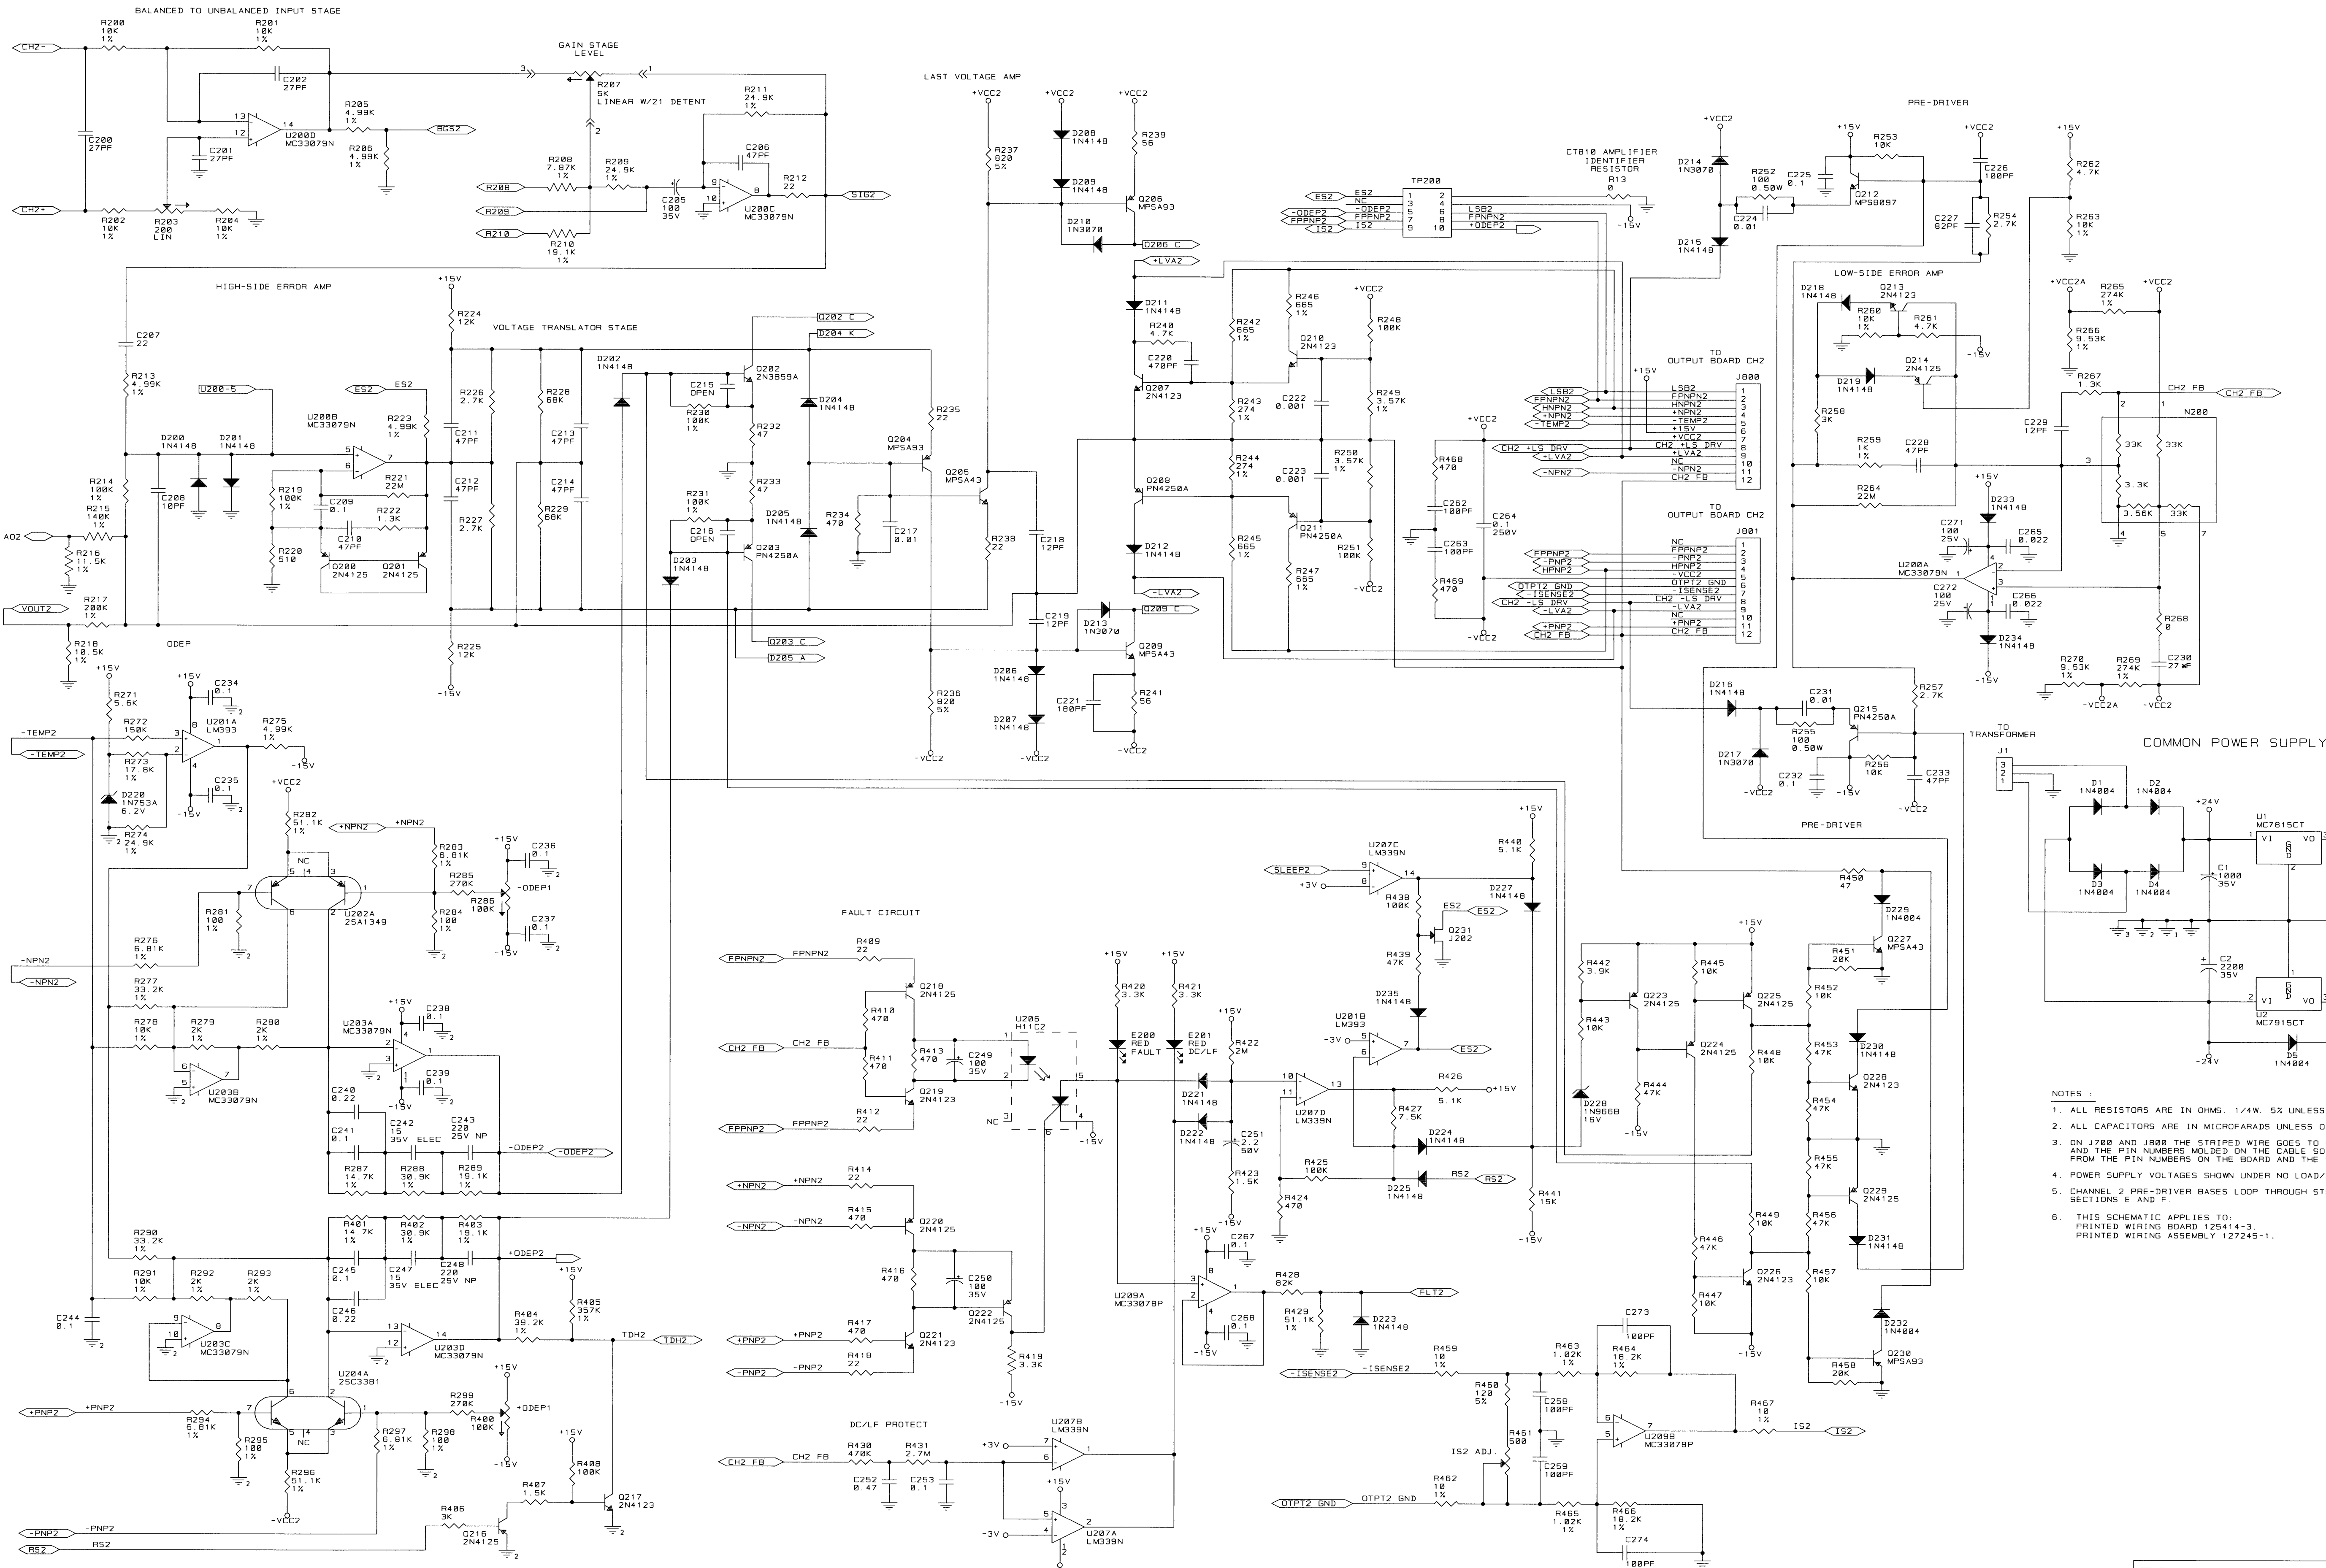

- NOTES :
1. ALL RESISTORS ARE IN OHMS, 1/4W, 5% UNLESS OTHERWISE SPECIFIED.
 2. ALL CAPACITORS ARE IN MICROFARADS UNLESS OTHERWISE SPECIFIED.
 3. ON J700 AND J800 THE STRIPED WIRE GOES TO PIN 12 OF THE BOARD AND THE PIN NUMBERS MOLDED ON THE CABLE SOCKET ARE REVERSED FROM THE PIN NUMBERS ON THE BOARD AND THE SCHEMATIC.
 4. POWER SUPPLY VOLTAGES SHOWN UNDER NO LOAD/NO SIGNAL CONDITIONS.
 5. CHANNEL 2 PRE-DRIVER BASES LOOP THROUGH STEREO-MONO SWITCH S100, SECTIONS E AND F.
 6. THIS SCHEMATIC APPLIES TO:
PRINTED BOARD 125414-3
PRINTED WIRING ASSEMBLY 127245-1.