



CROWN[®]
by HARMAN

XTi 2.5

Power Amplifier



XTi 1002A

XTi 2002A


XTi 4002A

XTi 6002A


Features:

- PeakX Plus™ Limiters provide the ultimate in system performance and protection by allowing full control over threshold, attack, and release
- Enhanced Subharmonic Synth section provides user control over frequency, gain and filter type for system-specific tuning
- 3 user-defined fan mode controls — normal, early and fullspeed — for matching fan performance to a specific application
- New system monitoring provides software visibility of AC line voltage and power supply temperature
- Increased number of presets to a total of 50 presets; 49 of which are user defineable
- Integrated cast-aluminum handles for easy handling and enhanced durability
- Locking power cord clip provides a secure connection between the amplifier and power cord
- Updated HiQnet System Architect™ control software

XTi 2.5

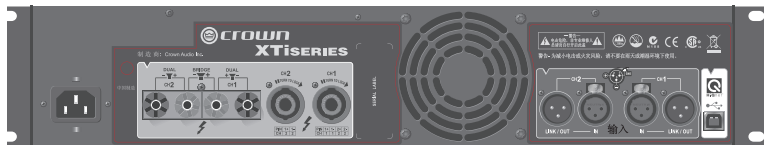

XTi 1002A, 2002A, 4002A

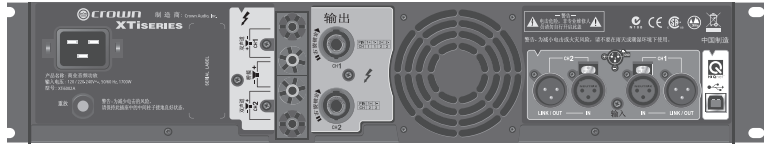

XTi 6002A

Specification

Regular Information		XTi 1002A	XTi 2002A	XTi 4002A	XTi 6002A
Minimum Guaranteed Power 1kHz					
Stereo, 2 ohms (per ch.)	Per Channel, both channels driven	600W	975W	1275W	3000W
Stereo, 4 ohms (per ch.)	Per Channel, both channels driven	400W	800W	1100W	2100W
Stereo, 8 ohms (per ch.)	Per Channel, both channels driven	240W	475W	650W	1200W
Bridge-Mono, 4 ohms	Per Channel, both channels driven	1200W	1950W	2550W	6000W
Bridge-Mono, 8 ohms	Per Channel, both channels driven	800W	1600W	2200W	4200W
Stereo, 2 ohms (per ch.)	Rated Power @220VAC, 1 min continuous	600W	975W	1275W	1100W
Stereo, 4 ohms (per ch.)	Rated Power @220VAC, 1 min continuous	400W	800W	1100W	1200W
Stereo, 8 ohms (per ch.)	Rated Power @220VAC, 1 min continuous	240W	475W	650W	1000W
Notes:	With 0.5% THD.*With 1% THD.				
No. of Channels	2				
Sensitivity (volts RMS) for full rated power at 4 ohms	1.4V				
Signal to Noise Ratio (below rated 1 kHz power at 8 ohms, A-weighted)	100 dB (103 dB in XTi 6002A)				
THD (20Hz ~ 20kHz)	0.5% / 1%				
Intermodulation distortion (60Hz&7kHz 4:1 Fully loaded output -40dB)	=< 0.35%				
Frequency Response(1W@4Ω)	20Hz - 20kHz, +0/-1dB				
CrossTalk	>70 dB 20 Hz -1 kHz				
Damping Factor(10Hz-400Hz@8Ω)	> 500				
AC Line Voltage and Frequency Configurations Available (±10%)	220-240VAC 50/60Hz				
Structure					
Size (H x W x D)	89 x 482 x 311 mm	89 x 482 x 311 mm	89 x 482 x 311 mm	89 x 482 x 311 mm	89 x 482 x 411 mm
Net Weight	8.4 Kg	8.4 Kg	8.4 Kg	8.4 Kg	10.9 Kg
Shipping Weight	9.8 Kg	9.8 Kg	9.8 Kg	9.8 Kg	13.6 Kg

Crown Warranty

Crown International warrants to you, the ORIGINAL PURCHASER and ANY SUBSEQUENT OWNER of each NEW Crown product, for a warranty period (for specific period of warranty please refer to our warranty card or contact us or authorized dealers) from the date of purchase by the original purchaser that the new Crown product is free of defects in materials and workmanship. We further warrant the new Crown product regardless of the reason for failure, except as excluded in this Warranty.

Warranty is only valid within the country in which the product was purchased. Customers outside USA please contact Crown authorized dealer for Warranty information or call 574-2948200.



Specifications subject to change without prior notice. Latest information available at: CrownAudio.com.

Crown and Crown Audio are registered trademarks of Crown International. Other trademarks are the property of their respective owners.

©2016 Crown Audio, Inc. Printed in CHINA