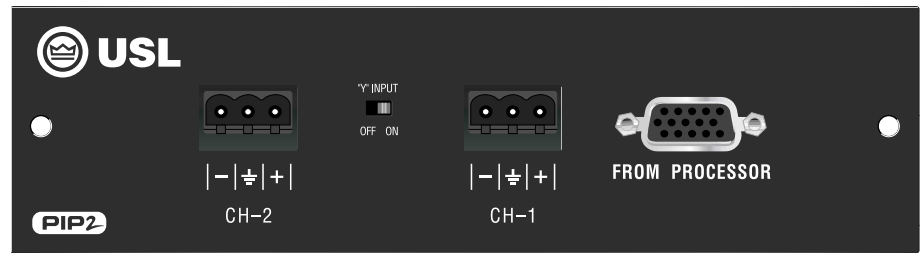


PIP SERIES
PIP-USL


The Crown® PIP™-USL module is designed to integrate Crown amplifiers into cinema audio systems installed in cinemas, studio production and post-production environments.

The PIP-USL installs into the back of Crown PIP2™-compatible amplifiers, saving rack space and simplifying system wiring.

The HD15 connector on the PIP-USL is designed for quick and easy interface with popular cinema monitor products such as the USL CM-680.

The module accepts signal for surround or subwoofer channels, or bi-amp signals for screen channels, from the cinema processor.

You must have a PIP2-compatible amplifier to use the PIP-USL. To determine if your amplifier is PIP2-compatible, look for the **PIP2** logo on the back of the amplifier. The PIP-USL is not compatible with older Crown PIP amplifiers.

For more details about the PIP-USL, contact the Crown Technical Support Group at 800-342-6939 or 574-294-8200. Also, visit the Crown Audio website at www.crownaudio.com.

Specifications


Input Connectors: Removable terminal block for balanced input connection.

Input/Output Connector: HD15 connector for balanced signal input and amplifier monitor output.

Controls: “Y” Input: An on/off switch located between the input connectors. When turned on, it parallels the two input channels. Caution: Do not turn on the “Y” Input switch when the PIP-USL is connected to the USL CM-680 via the HD15 connector.

Features

- Integrates Crown PIP2 amps into cinema systems
- Quick and easy interface with popular cinema monitor products such as the USL CM-680
- Input signal routing and amplifier output monitoring at cinema processor via HD15 connector
- Allows the amplifier to drive bi-amp screen channels, subwoofers and surrounds
- Removable terminal block connectors for balanced signal input
- “Y-Input” switch parallels input signals for both channels, and also allows easy daisy-chain signal connection to another amplifier
- Three Year, No-Fault, Fully Transferable Warranty completely protects your investment and guarantees its specifications.

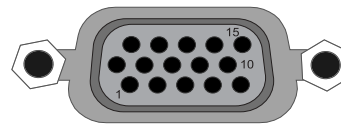
PIN

- 1 Ch1 Inverting Input
- 2 NC
- 3 Ch1 Output Voltage Monitor
- 4 NC
- 5 NC
- 6 Chassis Ground
- 7 Ch1 Non-Inverting Input
- 8 Ch2 Non-Inverting Input

PIN

- 9 NC
- 10 Signal Ground
- 11 Ch2 Inverting Input
- 12 NC
- 13 Ch2 Output Voltage Monitor
- 14 NC
- 15 NC



H A Harman International Company

Crown's Three-Year, No-Fault, Fully Transferable Warranty

Crown offers a Three-Year, No-Fault, Fully Transferable Warranty for every new Crown amplifier product—an unsurpassed industry standard. With this unprecedented No-Fault protection, your new Crown amplifier product is warranted to meet or exceed original specifications for the first three years of ownership. During this time, if your unit fails, or does not perform to original specifications, it will be repaired or replaced at our expense. About the only things not covered by this warranty are those losses normally covered by insurance and those caused by intentional abuse. And the coverage is transferable, should you sell your unit.

See your authorized Crown dealer for full warranty disclosure and details. For customers outside of the USA, please contact your authorized Crown distributor for warranty information or call 574-294-8200.

Crown International
 P.O. Box 1000
 Elkhart, IN 46515-1000
 TEL: 574-294-8200
 FAX: 574-294-8FAX
www.crownaudio.com

Specifications subject to change without prior notice. Latest information available at www.crownaudio.com.

Crown is a registered trademark of Crown International. PIP and PIP2 are trademarks of Crown International. Other trademarks are the property of their respective owners. Printed in U.S.A.